


TWISTED ROPE



Color Selection Black, White, Blue, Red, Green, Yellow
Packaging Selections Packaging: Hank, Clamshell, Coil, Reel
Product Number Twisted Rope

GALLERY IMAGES

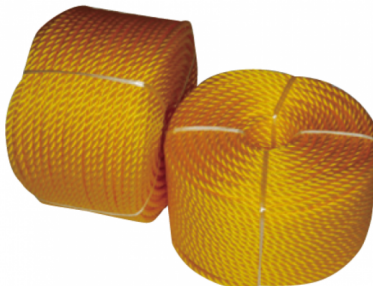

Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chih District, New Taipei City, Taiwan 22103
 Address in China: 102, Unit.2, Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109

Tel: +886-286471778 Email: panjack.co@msa.hinet.net





Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chih District, New Taipei City, Taiwan 22103

Address in China: Room 102, Unit.2 , Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109

Tel: +886-286471778 Email: panjack.co@msa.hinet.net



SPECIFICATION

Material: PP Multifilament (MFP) / Polyester / Nylon / PP Monofilament / PE

* **Custom Branded Available**

PP MULTIFILAMENT (MFP) TWISTED ROPE

- It Has Low Abrasion Resistance and is Affected by Sunlight

POLYESTER MULTIFILAMENT TWISTED ROPE

- It Is an Excellent in Resistance to Abrasion & Sunlight and Easy to Splice and Can for Mooring, Anchor, Fender Lines

PP MONOFILAMENT TWISTED ROPE

- It Is Strong, Lightweight, Spliceable and Used Extensively for Most rope Requirements

NYLON MULTIFILAMENT TWISTED ROPE

- Strong, Durable, Flexible and Shock Absorbent. .

- For Docking, Anchoring or Pulling.

PE TWISTED ROPE

- It Is Floatable, and Highly Resistant to Most Chemicals, Spliceable, Low Stretch

Diameter	Length	Packaging
3/16"	30', 50', 100' (1200', 2125')	Hank (Reel)
1/4"	50', 100' (900', 1200')	Hank (Reel)
3/8"	50', 100' (300', 600')	Hank (Reel)
5/16"	50', 100' (600', 900')	Hank (Reel)
1/2"	50', 100' (150', 400')	Hank (Reel)
5/8"	50', 100' (300')	Hank (Reel)
3/4"	50, 100' (200')	Hank (Reel)

PP MULTIFILAMENT (MFP) TWISTED ROPE

- It Has Low Abrasion Resistance and is Affected by Sunlight

POLYESTER MULTIFILAMENT TWISTED ROPE

- It Is an Excellent in Resistance to Abrasion & Sunlight and Easy to Splice and Can for Mooring, Anchor, Fender Lines

PP MONOFILAMENT TWISTED ROPE

- It Is Strong, Lightweight, Spliceable and Used Extensively for Most rope Requirements

NYLON MULTIFILAMENT TWISTED ROPE

- Strong, Durable, Flexible and Shock Absorbent. Spliceable

- For Docking, Anchoring or Pulling.

PE TWISTED ROPE

- It Is Floatable, and Highly Resistant to Most Chemicals, Spliceable, Low Stretch

Diameter (mm)	Length (M)	Packaging
4	220	Coil
6, 8, 10, 12, 14, 16	100, 220	Coil
18, 20, 24, 26, 28, 30, 32, 36	100	Coil

Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chin District, New Taipei City, Taiwan 22103

Address in China: Room 102, Unit.2, Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109

Tel: +886-286471778 Email: panjack.co@msa.hinet.net