




WHEEL BALANCER



Product Number 72-3471F

GALLERY IMAGES

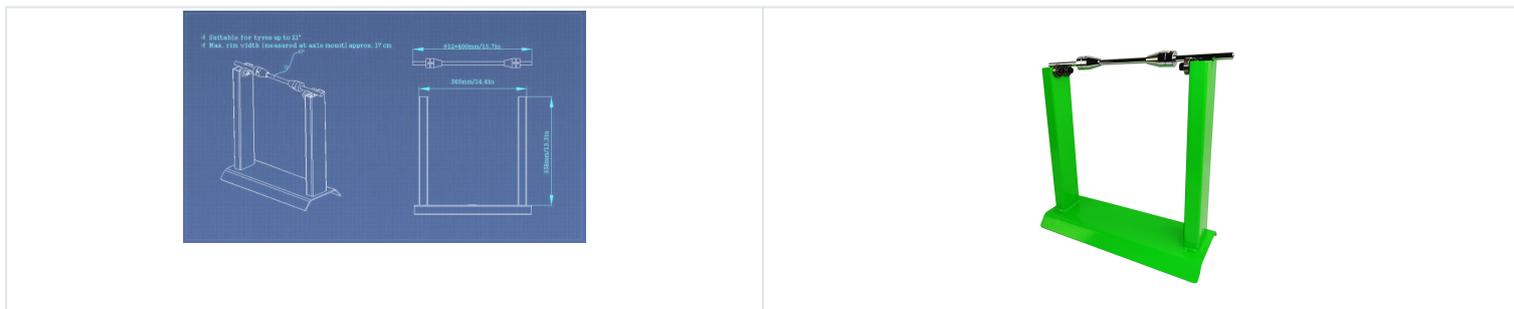

Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chih District, New Taipei City, Taiwan 22103
Address in China: Room 102, Unit.2 , Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109
Tel: +886-286471778 Email: panjack.co@msa.hinet.net



PRODUCT DESCRIPTION

- Stable stand for wheel balancing.
- Axle mount runs on ball bearings

Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chih District, New Taipei City, Taiwan 22103

Address in China: Room 102, Unit.2 , Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109

Tel: +886-286471778 Email: panjack.co@msa.hinet.net



ADDITIONAL INFORMATION

SPECIFICATION

Axle diameter: 12 mm (0.47 in), length: 40 cm (15.75 in)

Universal prism adapter makes the wheel balancer compatible with axle diameters from: 17.5 mm to 28.50 mm (0.69 to 1.12 in)

Suitable for tires up to 21"

Max. wheel hub width: 17 cm (6.69 in)

Address in Taiwan: 9F-3, No. 202, Sec. 3, Da-Tong Road, Hsi-Chih District, New Taipei City, Taiwan 22103

Address in China: Room 102, Unit.2 , Build. 24, No.417, Xing Yang Road, Cheng Yang District, Qingdao, China, 266109

Tel: +886-286471778 Email: panjack.co@msa.hinet.net